




4U01 T


INNOVATIVE CHASSIS

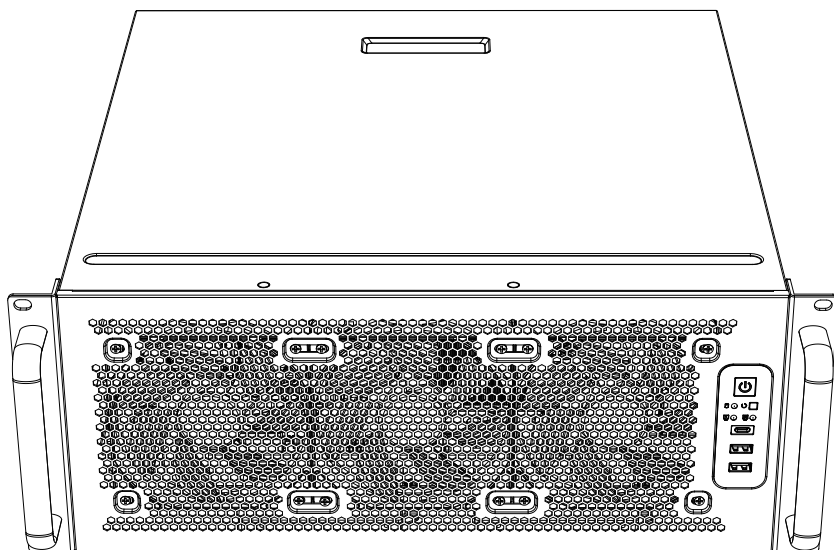

Hardware List

Hardwareliste / Lista de hardware / Список оборудования / 零件清单

a



Iron column X 7

b



ODD screws x 26

c



Hard disk screws x 8

d




Power supply screw x 4

e




Compression strip
serrated screws x 3

f




L-shaped retaining
strip x 3

g




Dedicated chassis
feet x 4


I/O Panel

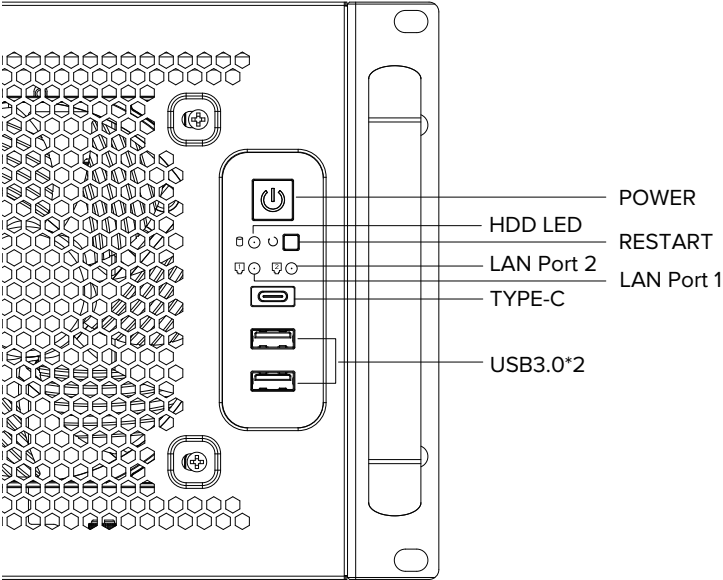


1.Remove the upper cover component

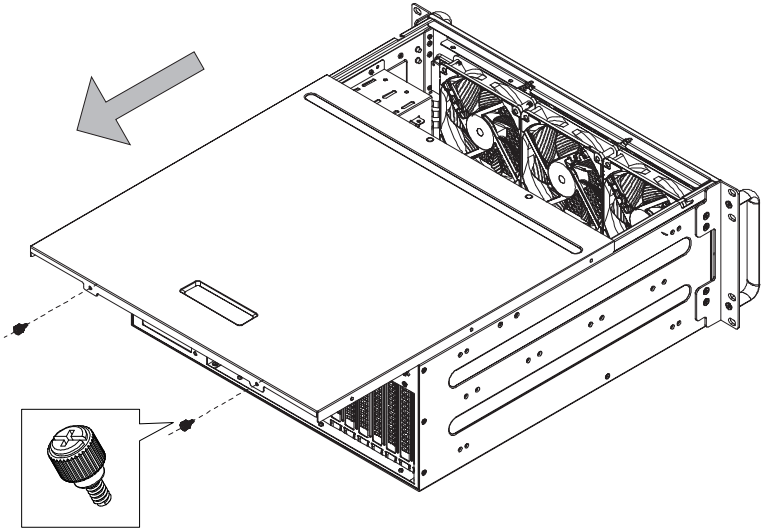


2. Remove the crossbeam and the clamping bar assembly, which requires 5 screws.

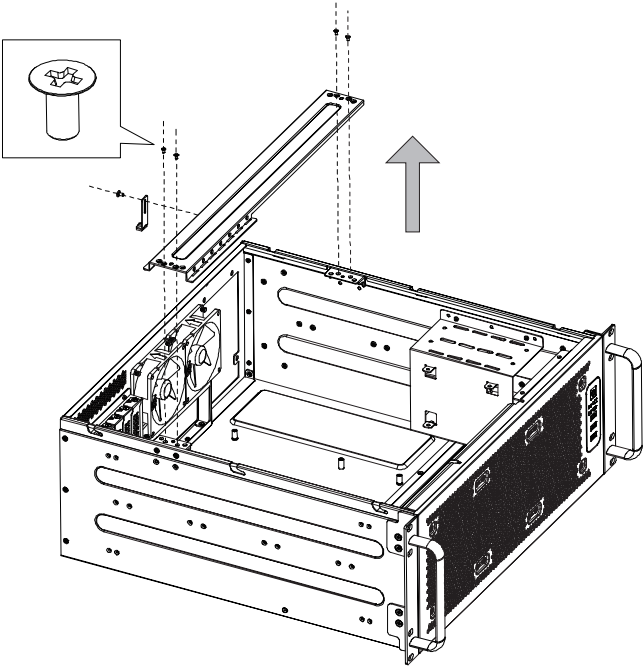


3.Install the 2.5” hard drive on the bracket, and assemble the entire unit at the base position.

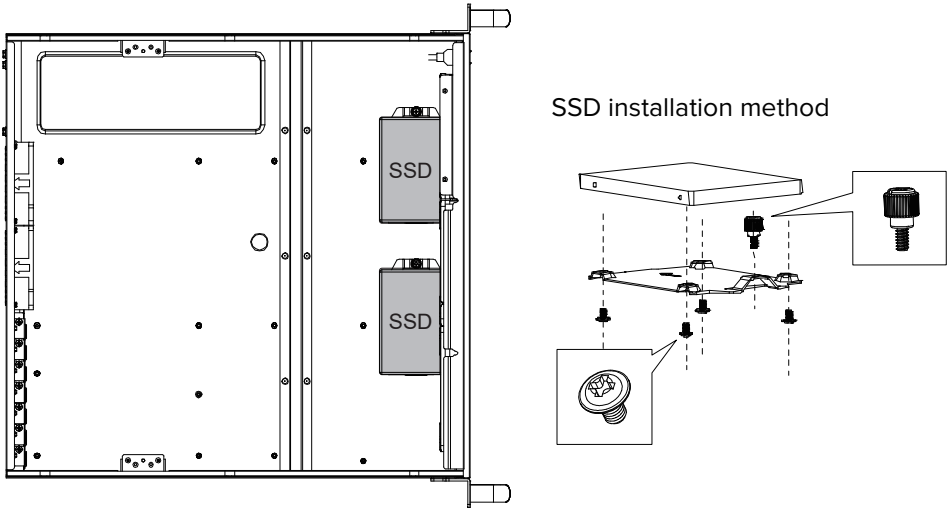


4. According to the motherboard specifications, lock the iron column of the parts package to the rivet corresponding to the use of the motherboard.

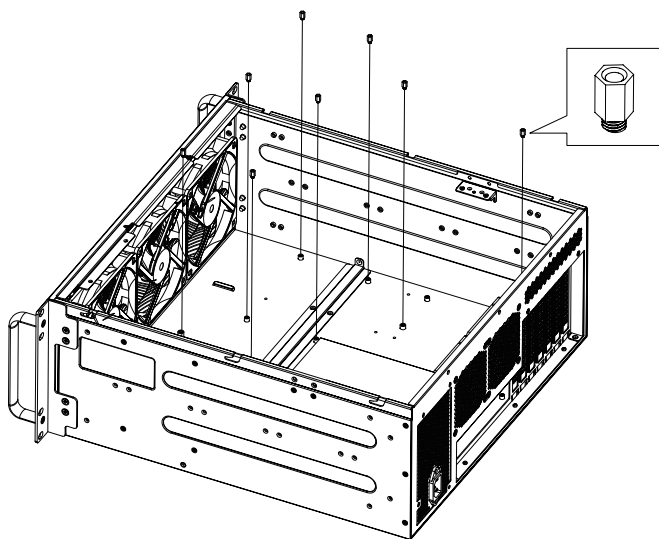


5. First, secure the IO cover plate in the designated IO slot. Then, insert the motherboard into the case. Use the appropriate number of screws according to the motherboard specifications for fixation.

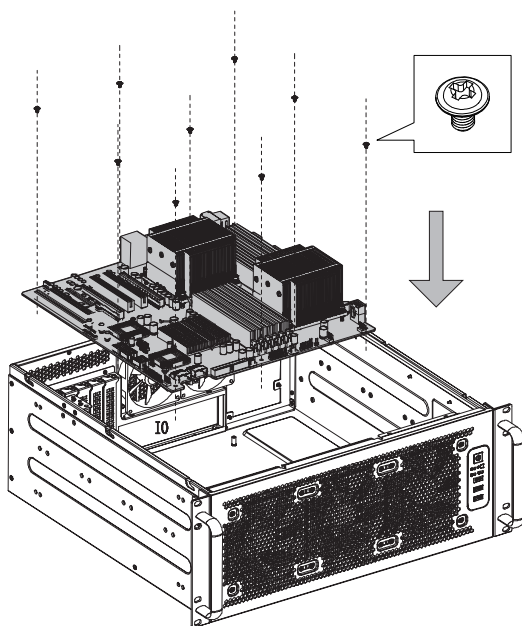


6. Orient the radiator and fans as shown in the illustration before installing them.

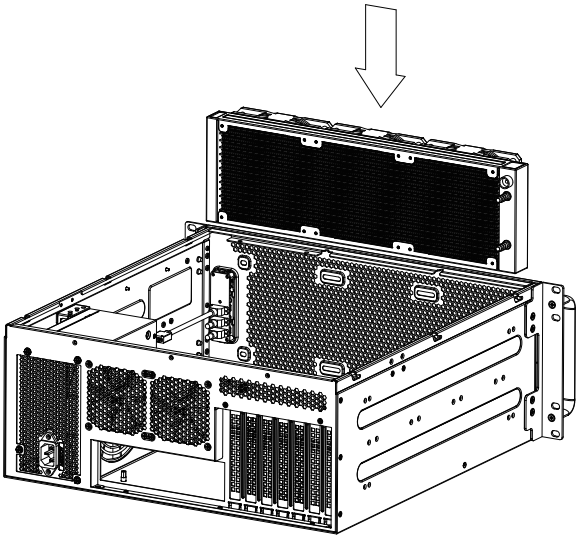


7. Use the screws to firmly attach the radiator and fans to the chassis.

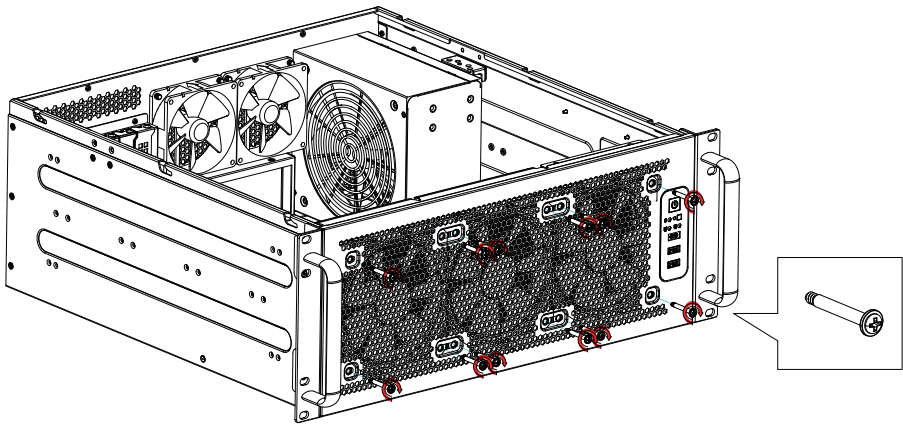


8. Install 3.5"*2 and 2.5"*1 components on the bracket,with the 2.5"*1 part placed at the top of the bracket.

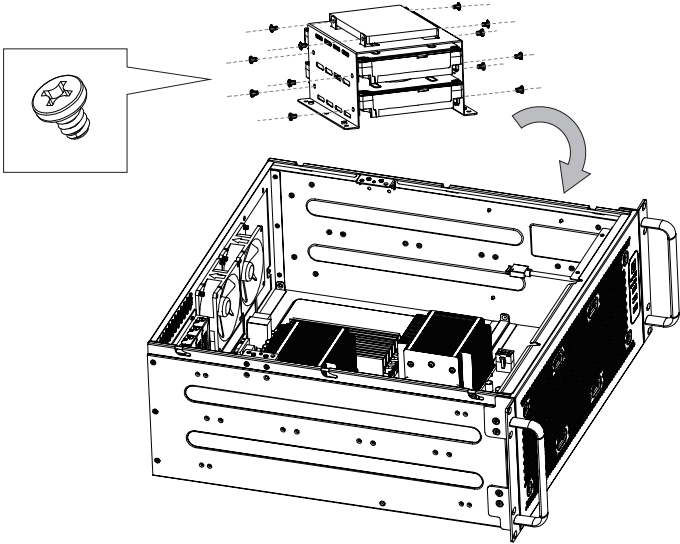


9. Lock the corresponding position on the base side of the assembled bracket.

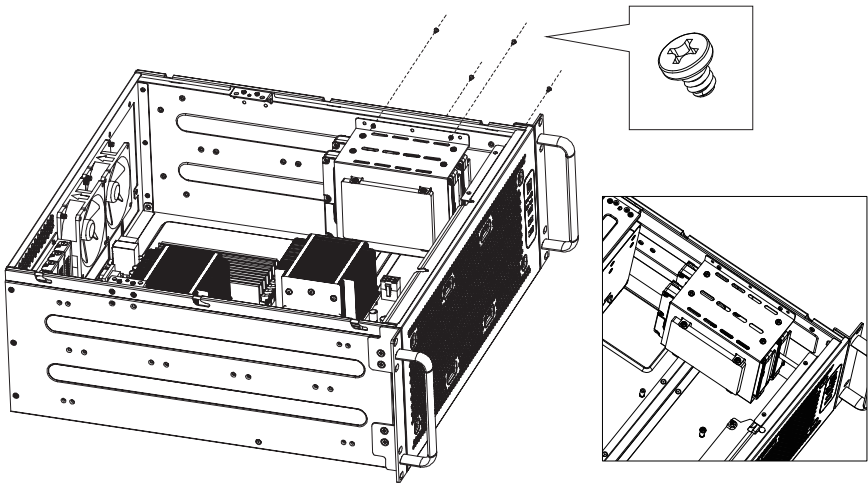


10. ATX power supply installation method.

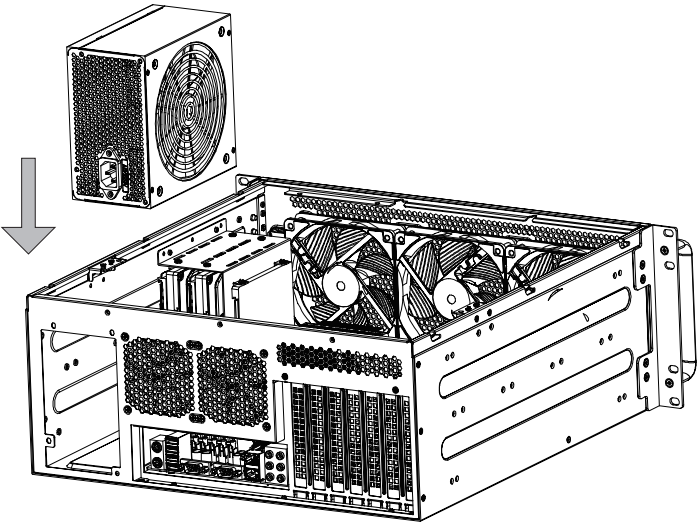


11. Install the ATX power supply and secure it in place using the 4 special screws provided on the rear of the case.

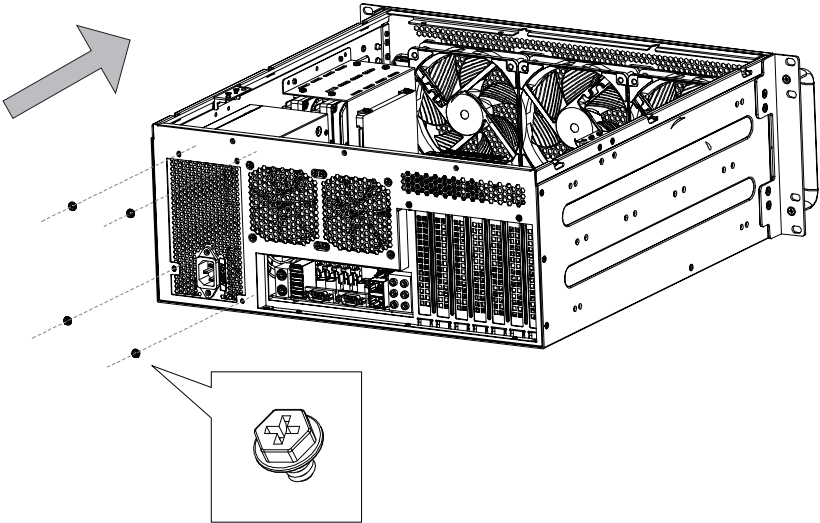


10. When the maximum total length of the graphics card reaches 350 millimeters, it will be used with the selected graphics card in the corresponding slot 1 and 2.

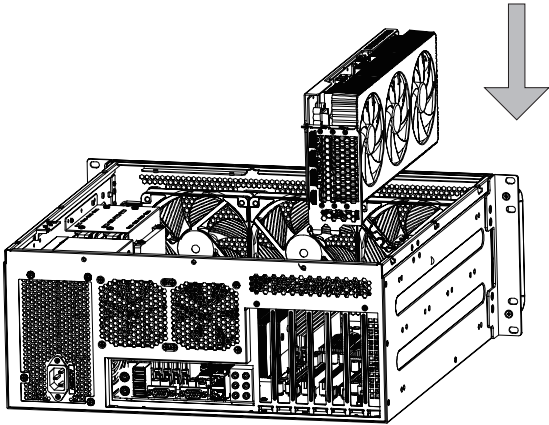


11. Fix the installed graphics card firmly using TM3*L5.5mm screws.

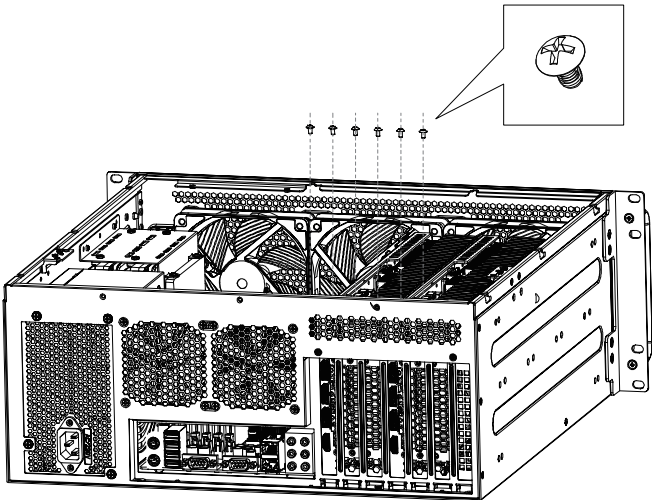


12. Display of related accessories installed inside the chassis.

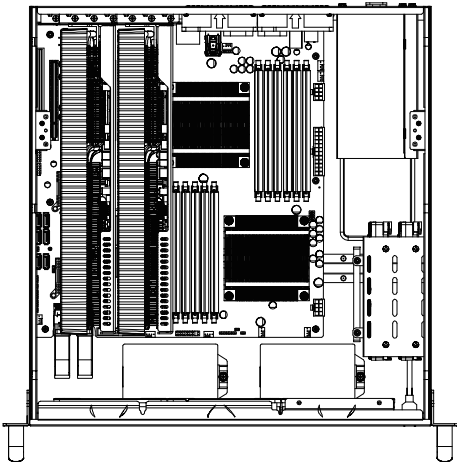


13. Adjust the position of the crossbeam fixing device according to the required height of the interface card, and then tighten the fastening screws.

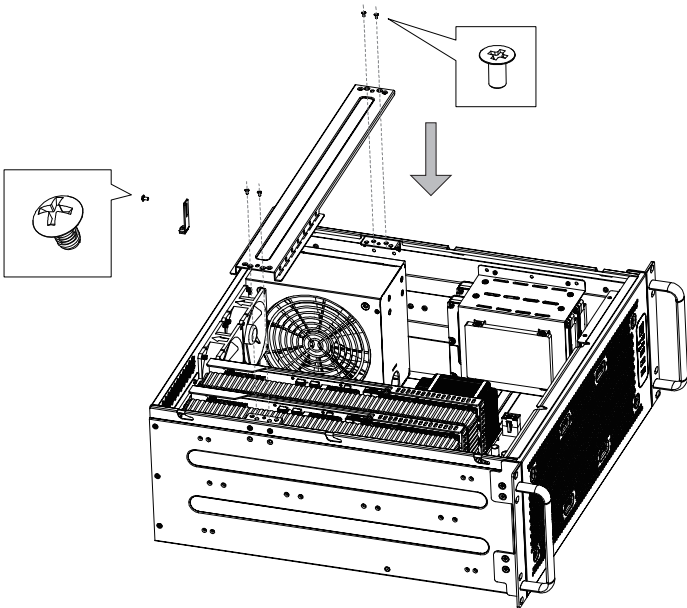


14. After determining the required height of the interface card, then tighten the screws of the clamping strip.

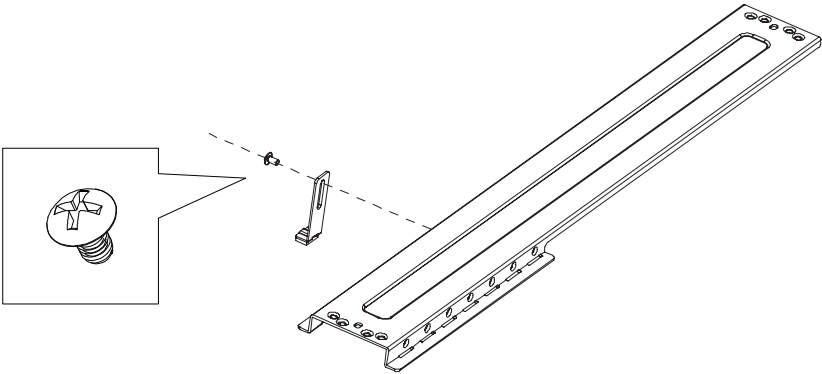

15. Install the cover component

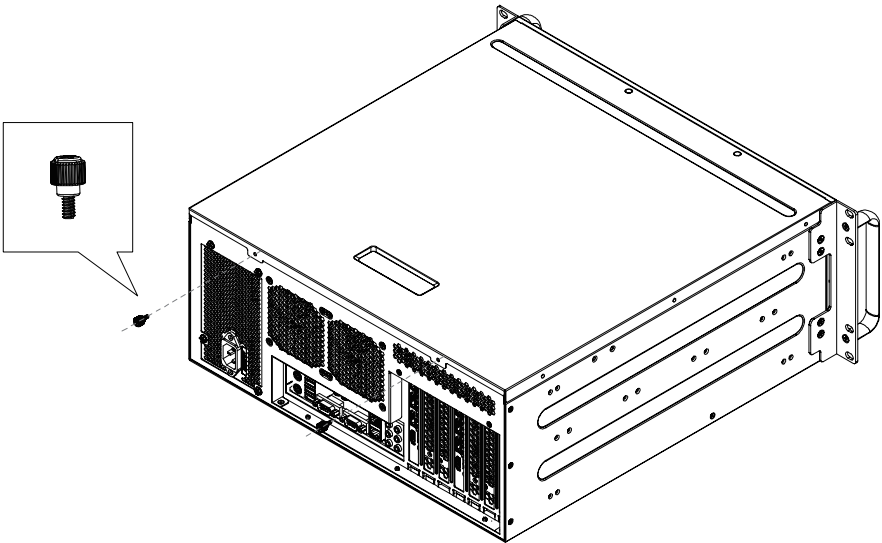


16. CPU Install the cover for the CPU cooler and the graphics card specifications limit.

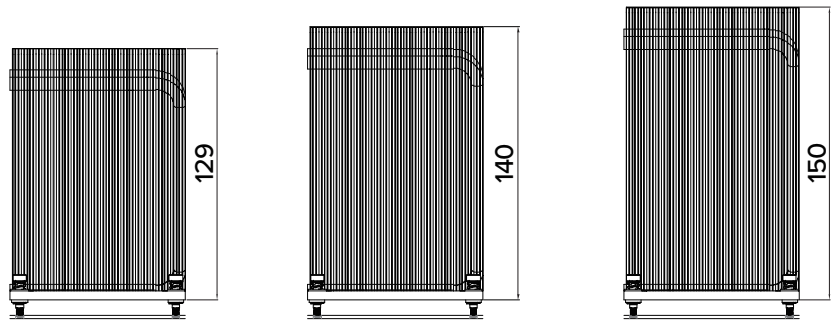


1. When installing the crossbeam, the maximum height limit for the CPU cooler is 148mm. The maximum height limit for the CPU cooler without the crossbeam is 152mm.

2. When installing the crossbeam and the graphics card holder, the GPU height is limited to a maximum of 110mm."

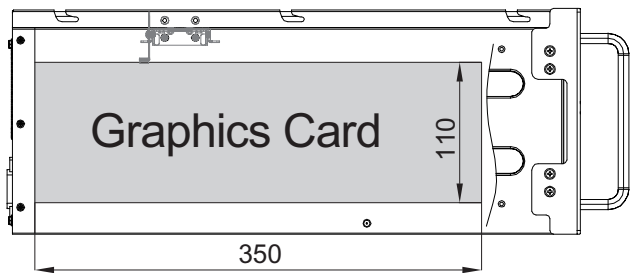

3.When installing the crossbeam, the GPU height is limited to a maximum of 139mm.

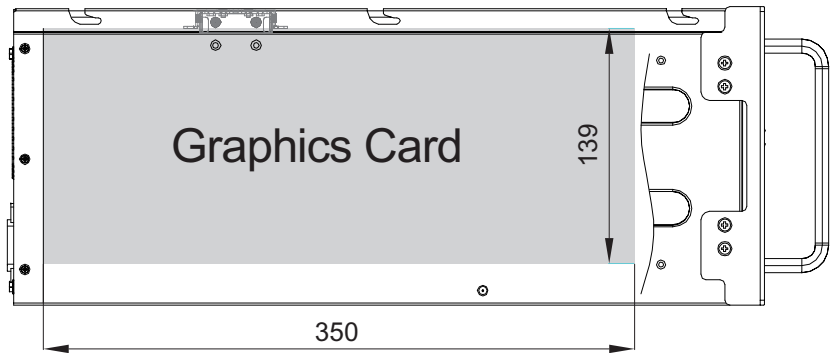

4.When the crossbeam is removed, the GPU height is limited to a maximum of 150mm.

